


GAA_m HEAT SHIELD TUBE

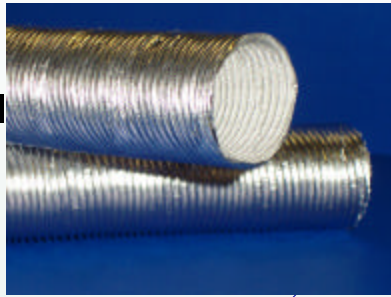

Purpose : The GAA_m tube is applicable for thermal protection of critical components in high temperature environments. It serves as a flame resistant insulated cover for: hoses, fluid lines, plastic tubes, electrical harnesses, etc.

Characteristics : light weight, flexible, insulation, anti-corrosion


Available Size : Ø14.5 — Ø65 mm (ID)

Bend "R" : 1.7 x Diameter with no cracking



Compression Strength : 185N at 3mm

Insulation Performance

Heater Source Temperature	Inside Surface Temperature (Diameter of tube @ 20mm)
200°C / 392°F	68°C / 154°F
250°C / 482°F	78°C / 172°F
300°C / 572°F	92°C / 198°F
400°C / 752°F	124°C / 255°F

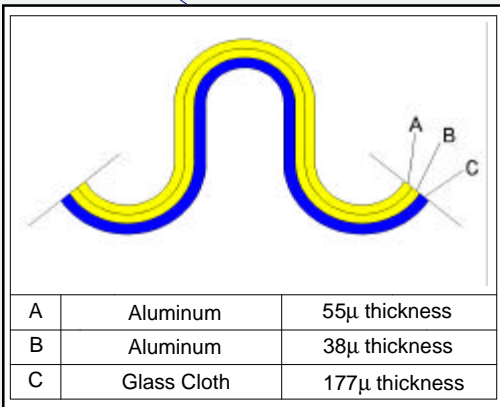

Test Performed	Test Method	Test Results
Peel Strength	ASTM D-1876	Pass
Thermal Endurance	Oven Soak 24hrs at 175°C	No sign of product delamination or distortion
Flammability	ASTM D-4723 / FMVSS 302	Pass
Bend Test	1.7 x Diameter	No sign of cracking or deformation
Fluid Resistance	30 minute immersion <ul style="list-style-type: none"> gasoline brake fluid diesel fuel (60 min) antifreeze solution motor oil transmission fluid power steering fluid distilled water washer fluid 	No sign of product degradation or delamination of coating All passed
SAE J2302	Thermal Efficiency	Results - See chart below

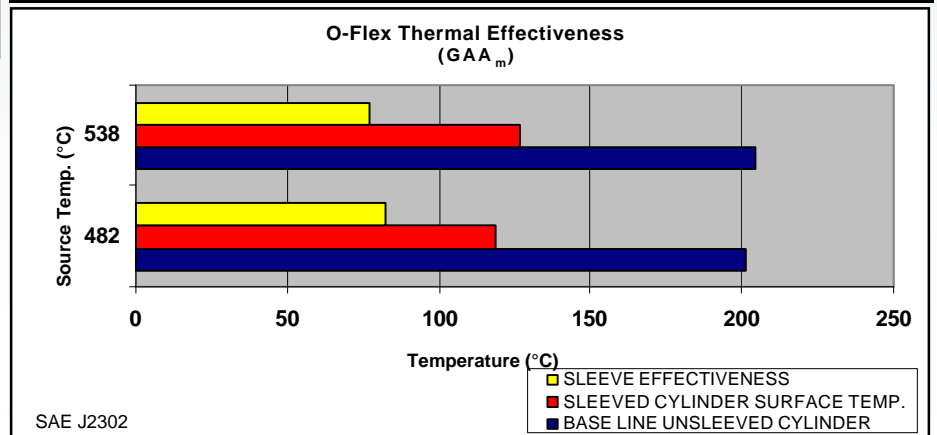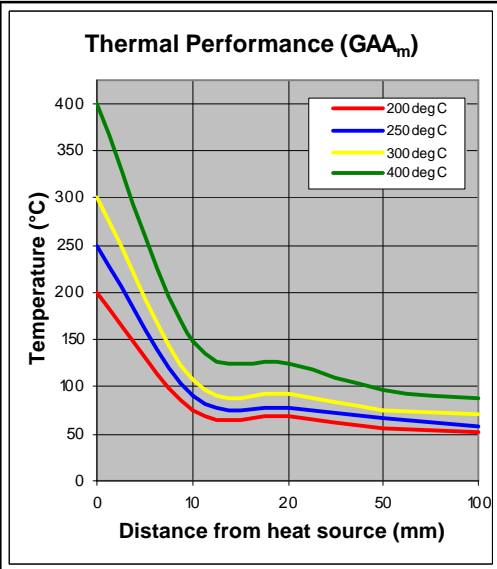

O-FLEX INC

O-Flex Automotive
1972 Starr Batt
Rochester Hills, MI 48309

Phone: (248) 997-7200

Fax: (248) 299-5767

E-mail: twinter@oflex.com

www.oflex.com

SAE J2302